

BOSIG GmbH

Fasatan®/Fasatyl®



 **BOSIG**

FASATAN® / FASATYL®

The facade sealing system.

Trusted brand quality for reliable protection of facades against moisture and cold draught.


Ensure more safety on construction sites by using the **FASATAN®/FASATYL®** system with high flexibility for window and facade connection sealing. The sealing foils are made of an EPDM and butyl rubber base material, and can be worked quickly and easily without pre-treatment or mechanical fixing. Even in difficult areas, such as uneven undergrounds or corners, the rot, age, UV and bitumen-resistant material will not cause any problems. You will be working with a top brand for facade sealing.

Outdoors **FASATAN®** - Indoors **FASATYL®**
That's how to seal window and facade joints reliably!

Moisture has no chance, because we use best raw materials to manufacture best quality.

FASATAN® is made of EPDM rubber and is a polymerized rubber compound from ethylene and polypropylene whose completely saturated molecules ensure unlimited resistance to weathering of any kind. The sealing strips have outstanding physical and chemical properties, and are breathable. That's what makes them outstandingly suitable for sealing outer facades.

FASATYL® is made of butyl rubber and is a copolymer of isobutylene with a large amount of isoprene. The vulcanization of the butyl rubber creates a damp-proof strip that is absolutely resistant to oxidation, nitrogen, air and water. That's what makes it the ideal material for the safe interior sealing of windows and facade connections.

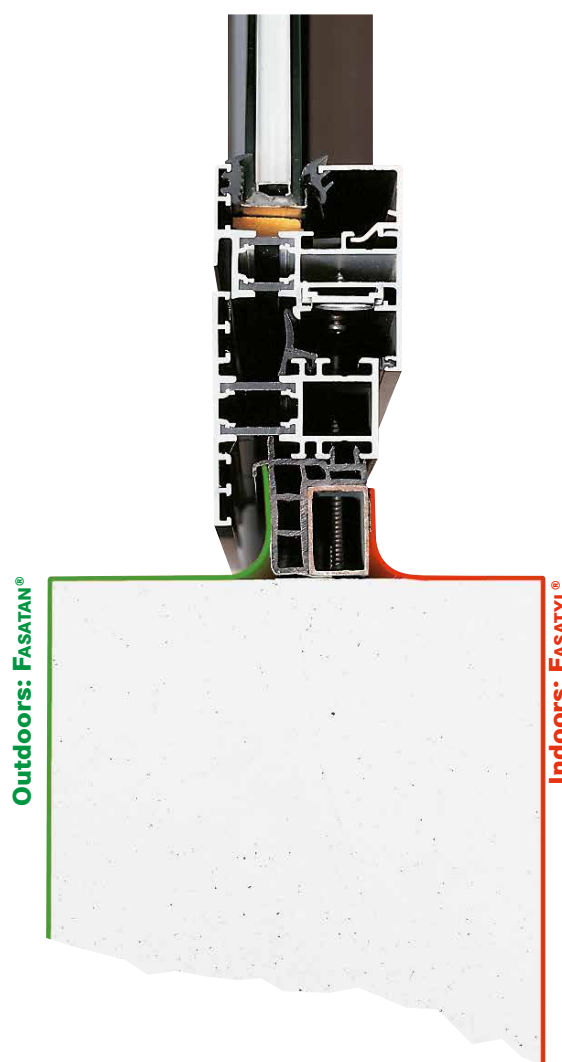

FASATAN® (breathable for exterior application) and **FASATYL®** (absolutely watertight for interior application).

Thickness of strips: 0,6 / 0,8 / 1,0 / 1,5 mm

Strip width: 100-1500 mm

Standard length: 20 m

All a professional needs out of one hand.

FASATAN® TFK CONTACT ADHESIVE

with particularly good working viscosity for the attachment of sealing strips to all usual bases. For the application with brush, lambskin roll or airless process on strip and base on both sides.

Packing unit: 5,5 kg.

FASATAN® TFS SPECIAL ADHESIVE

(solvent-free!) for sealing window connection joints on one side with an universal manual pressure gun, and subsequent filling. Outstanding adhesion on almost all usual bases.

Packing unit: 600 ml pouch.

BUTYLBAND STRIPE DS double-sided selfadhesive. The reliable adhesive strip for the pre-installation of our sealing foils.

Thickness: 1,5 mm

Standard width: 15 mm

Standard roll length: 30 m

FASATAN® CLEANER/THINNER for pre-treatment of base or the removal of adhesive residues.

Packing unit: 5 l.

FASATAN® TFU is a polyurethane adhesive for the gluing of **FASATAN®/FASATYL®**. Packing unit: 600 ml pouch.

Other dimensions are available on request.



No more chance for moisture!

All **FASATAN®**- and **FASATYL®** sealing strips are also available with welded weatherstrips.

Contact us. We will be pleased to advise you!

Have you already heard about our **FASATAN®-WEATHERSTRIP** and **FASATAN®-FIX-SYSTEM?**
For more information visit: www.fasatan.com

Build on Solutions



BOSIG GmbH

Brunnenstraße 75-77

D-73333 Gingen/Fils

Tel. +49 (0) 7162-4099-0

Fax +49 (0) 7162-4099-200

Email: info@bosig.de

www.bosig.de